Ref	Hits	Search Query	DBs	Default	Plurals	Time Stamp
#		,	003	Operator		,
L1	0	("Fourier-Mellin" or "Fourier Mellin") and union! and intercept\$5 and @ad<"20011204"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:39
L2	1784	union! and intercept\$5 and @ad<"20011204"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 20:40
L3	111	2 and ("similarity metric" or "distance metric" or metric) and @ad<"20011204"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 20:51
L4		2 and ("similarity metric" or "distance metric") and @ad<"20011204"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 20:42
L5	147	("Fourier-Mellin" or "Fourier Mellin") and @ad<"20011204"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:39
L6	115	2 and descriptor\$1	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 20:52
L7	5211	compaq.as.	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:11
L8	0	7 and similarit\$5 and descripttor\$2	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:12
L9	0	7 and descripttor\$2	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:12
L10	1	7 and ("Fourier-Mellin" or "Fourier Mellin")	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:13
L11	2	chen-trista.in.	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:13

L12	12	("5713032" "5892900" "5943422" "5946414" "5974548" "6122403" "6141441" "6278385" "6345104" "6363159" "6373974" "6542927").PN.	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/11 21:15
L13	9359	metric and ratio and set\$1 and @ad<"20011204"	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:39
L14	38	13 and ("Fourier-Mellin" or "Fourier Mellin")	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:43
L15	518	13 and image same search\$3	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:43
L16	7	15 and union and interception\$1	US-PGPUB; USPAT; EPO; JPO; DERWENT	OR	ON	2005/06/11 21:44



Home | Login | Logout | Access Information | Alerts |

Welcome United States Patent and Trademark Office

Search Re	esults			BROWSE	SEARCH	IEEE XPLORE G	UIDE	
Your sear	r "((fourier-mellin ch matched 2 of 11 m of 100 results are	68854 doc	uments.	sorted by Relevance in	n Descending ord	ler.	∭e-nwi	
» <u>View Ses</u>	sion History							
» <u>New Sear</u>	<u>rch</u>	Modi	fy Search					
» Key		((fouri	er-mellin descript	ors) <in>metadata)</in>		52		
IEEE JNL	IEEE JNL IEEE Journal or Magazine		Check to search only within this results set Display Format: Citation Citation & Abstract					
IEE JNL IEE Journal or Magazine		Displ						
IEEE CNF	IEEE Conference Proceeding	Select	Article Infor	mation				
IEE CNF	IEE Conference Proceeding			content-based image	_	complete set of Four	ier-Mellin de	
IEEE STD	IEEE Standard		Multimedia	S.; Daoudi, M.; Ghorbel Computing and Syste 7-11 June 1999 Page	ms, 1999. IEEE In		e on	
			<u>AbstractPl</u>	<u>us</u> Full Text: <u>PDF</u> (412	(KB) IEEE CNF			
			transform Gotze, N.; Pattern Re Volume 1,	Drue, S.; Hartmann, G cognition, 2000. Proce 3-7 Sept. 2000 Page(i.; edings. 15th Interi s):948 - 951 vol.1			
			AbstractPl	us I Full Text: PDF(468	KB) IEEE CNF			

View Selected Rams

Help Contact Us Privacy &:

© Copyright 2005 IEEE -

Indexed by #Inspec*

∭e-mail



Home | Login | Logout | Access Information | Alerts |

Welcome United States Patent and Trademark Office

Search Results

BROWSE

SEARCH

IEEE XPLORE GUIDE

Results for	"(fourier-mellin <in>metadata)"</in>	
-------------	--------------------------------------	--

Your search matched 32 of 1168854 documents.

A maximu	m of 100 results are	e displayed	l, 25	to a page, sorted by Relevance in Descending order.			
	sion History	Madi	5 · C	aa rah			
New Sear	<u>rch</u>	Modif		earcn			
» Key] 648		
IFFF JNI	IEEE Journal or	Цc	hec	k to search only within this results set			
	Magazine	Display Format: © Citation & Abstract					
IEE JNL	IEE Journal or Magazine						
IEEE CNF	IEEE Conference Proceeding	Select	Α	rticle Information			
IEE CNF	IEE Conference Proceeding		1.	Symmetric phase-only matched filtering of Fourier-Mellin tran recognition	sforms for image re		
IEEE STD	IEEE Standard			Qin-Sheng Chen; Defrise, M.; Deconinck, F.; Pattern Analysis and Machine Intelligence, IEEE Transactions on Volume 16, Issue 12, Dec. 1994 Page(s):1156 - 1168			
				AbstractPlus Full Text: PDF(1624 KB) IEEE JNL			
			2.	The theoretical prediction, interpretation and computation of to sonar classification of shlps Lee, J.S.; Burke, M.J.; Hammond, J.K.; Acoustics, Speech, and Signal Processing, 1990. ICASSP-90., 19: 3-6 April 1990 Page(s):2735 - 2738 vol.5			
				AbstractPlus Full Text: PDF(228 KB) IEEE CNF			
			3.	Fast spectral algorithms of Invariants calculation Labunets, E.; Labunets, V.; Egiazarian, K.; Astola, J.; Image Analysis and Processing, 1999. Proceedings. International 27-29 Sept. 1999 Page(s):203 - 208	Conference on		
		•		AbstractPlus Full Text: PDF(160 KB) IEEE CNF			
·			4.	An integrated framework for image classification Xuling Luo; Mirchandani, G.; Acoustics, Speech, and Signal Processing, 2000. ICASSP '00. Pro Conference on Volume 1, 5-9 June 2000 Page(s):620 - 623 vol.1 AbstractPlus Full Text: PDF(384 KB) IEEE CNF	oceedings. 2000 IEEI		
			5.	Fast registration of tabular document Images using the Fourier Hutchison, L.A.D.; Barrett, W.A.; Document Image Analysis for Libraries, 2004. Proceedings. First I 2004 Page(s):253 - 267 AbstractPlus Full Text: PDF(2461 KB) IEEE CNF			
			6.	Bootstrap sampling applied to image analysis Ghorbel, F.; Banga, C.; Acoustics, Speech, and Signal Processing, 1994. ICASSP-94., 19 Volume vi, 19-22 April 1994 Page(s):VI/81 - VI/84 vol.6	94 IEEE Internationa		

AbstractPlus | Full Text: PDF(304 KB) | IEEE CNF 7. 2-D object recognition using Fourier Mellin transform and a MLP network Raman, S.P.; Desai, U.B.; Neural Networks, 1995. Proceedings., IEEE International Conference on Volume 4, 27 Nov.-1 Dec. 1995 Page(s):2154 - 2156 vol.4 AbstractPlus | Full Text: PDF(232 KB) | IEEE CNF 8. Detection of human faces in complex scene images by use of a skin color model Fourier-Mellin moments Terrillon, J.-C.; David, M.; Akamatsu, S.; Pattern Recognition, 1998. Proceedings. Fourteenth International Conference on Volume 2, 16-20 Aug. 1998 Page(s):1350 - 1355 vol.2 AbstractPlus | Full Text: PDF(476 KB) IEEE CNF 9. Classification of rotated and scaled textures using HMHV spectrum estimation at Mellin transform Alata, O.; Cariou, C.; Ramananjarasoa, C.; Najim, M.; Image Processing, 1998. ICIP 98. Proceedings. 1998 International Conference on Volume 1, 4-7 Oct. 1998 Page(s):53 - 56 vol.1 AbstractPlus | Full Text: PDF(696 KB) IEEE CNF 10. Invariant content-based image retrieval using a complete set of Fourier-Mellin de Derrode, S.; Daoudi, M.; Ghorbel, F.; Multimedia Computing and Systems, 1999. IEEE International Conference on Volume 2, 7-11 June 1999 Page(s):877 - 881 vol.2 AbstractPlus | Full Text: PDF(412 KB) IEEE CNF 11. Invariant object recognition with discriminant features based on local fast-Fourie П transform Gotze, N.; Drue, S.; Hartmann, G.; Pattern Recognition, 2000. Proceedings. 15th International Conference on Volume 1, 3-7 Sept. 2000 Page(s):948 - 951 vol.1 AbstractPlus | Full Text: PDF(468 KB) IEEE CNF 12. Invariant neural-network based face detection with orthogonal Fourier-Mellin mo Terrillon, J.-C.; McReynolds, D.; Sadek, M.; Sheng, Y.; Akamatsu, S.; Pattern Recognition, 2000. Proceedings. 15th International Conference on Volume 2, 3-7 Sept 2000 Page(s):993 - 1000 vol.2 AbstractPlus | Full Text: PDF(680 KB) | IEEE CNF 13. Invariant descriptor of Fourier-Mellin for indexing by contents a database of thre images Jiao, S.H.; Goutte, R.; Signal Processing, 2002 6th International Conference on Volume 1, 26-30 Aug. 2002 Page(s):858 - 860 vol.1 AbstractPlus | Full Text: PDF(237 KB) | IEEE CNF 14. Interferometric SAR image coregistration based on the Fourier-Mellin invariant d Abdelfattaha, R.; Nicolasa, J.M.; Tupin, F.; Geoscience and Remote Sensing Symposium, 2002. IGARSS '02. 2002 IEEE Internati Volume 3, 24-28 June 2002 Page(s):1334 - 1336 vol.3 AbstractPlus | Full Text: PDF(499 KB) | IEEE CNF Recognition of digital annotation with invariant HONN based on orthogonal Four Jin-Peng Wang; Yi Sun; Qiang Chen;

Volume 4, 2-5 Nov. 2003 Page(s):2261 - 2264 Vol.4 AbstractPlus | Full Text: PDF(310 KB) | IEEE CNF 16. Log-polar sampling incorporating a novel spatially variant filter to improve object Thornton, A.L.; Sangwine, S.J.; Image Processing and Its Applications, 1997., Sixth International Conference on Volume 2, 14-17 July 1997 Page(s):776 - 779 vol.2 AbstractPlus | Full Text: PDF(344 KB) IEE CNF 17. A neural architecture for unsupervised learning with shift, scale and rotation invi-software simulation heuristics, and optoelectronic implementation Wunsch, D.C., II; Newman, D.S.; Caudell, T.P.; Capps, D.; Falk, R.A.; System Sciences, 1991. Proceedings of the Twenty-Fourth Annual Hawaii Internationa Volume i, 8-11 Jan. 1991 Page(s):298 - 304 vol.1 AbstractPlus | Full Text: PDF(396 KB) IEEE CNF 18. The second-order neural network for radar ship target recognition Liang Min; Sun Zhongkang; Liu Juchang; Aerospace and Electronics Conference, 1992. NAECON 1992., Proceedings of the IEE 18-22 May 1992 Page(s):270 - 274 vol.1 AbstractPlus | Full Text: PDF(236 KB) | IEEE CNF 19. Study of two methods in radar target recognition П He Guanghui; Shen Xiuming; Fen Zhenming; Fan Honghong; Peng Yinnin; Lu Dajing; Radar, 1996. Proceedings., CIE International Conference of 8-10 Oct. 1996 Page(s):674 - 678 AbstractPlus | Full Text: PDF(332 KB) IEEE CNF 20. Fast spectral algorithms for invariant pattern recognition and image matching be П invariants Labunets, E.; Labunets, V.; Assonov, M.; Lenz, R.; Image Processing, 1996. Proceedings., International Conference on Volume 3, 16-19 Sept. 1996 Page(s):607 - 610 vol.3 AbstractPlus | Full Text: PDF(340 KB) IEEE CNF 21. Rotation, scale and translation invariant digital image watermarking O'Ruanaidh, J.J.K.; Pun, T.; Image Processing, 1997. Proceedings., International Conference on Volume 1, 26-29 Oct. 1997 Page(s):536 - 539 vol.1 AbstractPlus | Full Text: PDF(384 KB) IEEE CNF 22. A two-stage algorithm for model-based registration of medical Images Lehmann, T.M.: Pattern Recognition, 1998. Proceedings. Fourteenth International Conference on Volume 1, 16-20 Aug. 1998 Page(s):344 - 351 vol.1 AbstractPlus | Full Text: PDF(1024 KB) | IEEE CNF 23. Similitude invariant pattern recognition on technical documents Ogier, J.-M.; Cariou, C.; Adam, S.; Mullot, R.; Gardes, J.; Lecourtier, Y.; Image Processing, 1999. ICIP 99. Proceedings. 1999 International Conference on Volume 1, 1999 Page(s):570 - 574 vol.1 AbstractPlus | Full Text: PDF(308 KB) IEEE CNF П ^{24.} A rotation, scale and translation resilient public watermark Wu, M.; Miller, M.L.; Bloom, J.A.; Cox, I.J.; Acoustics, Speech, and Signal Processing, 1999. ICASSP '99. Proceedings., 1999 IEE

Machine Learning and Cybernetics, 2003 International Conference on

Conference on Volume 4, 15-19 March 1999 Page(s):2065 vol.4 <u>AbstractPlus</u> | Full Text: <u>PDF</u>(36 KB) **IEEE CNF**

25. Comparative performance of different skin chrominance models and chrominance automatic detection of human faces in color images

Terrillon, J.-C.; Shirazi, M.N.; Fukamachi, H.; Akamatsu, S.; Automatic Face and Gesture Recognition, 2000. Proceedings. Fourth IEEE Internation 28-30 March 2000 Page(s):54 - 61


AbstractPlus | Full Text: PDF(236 KB) | IEEE CNF

View Selected Items

#Inspec

Help Contact Us Privacy &:

© Copyright 2005 IEEE -

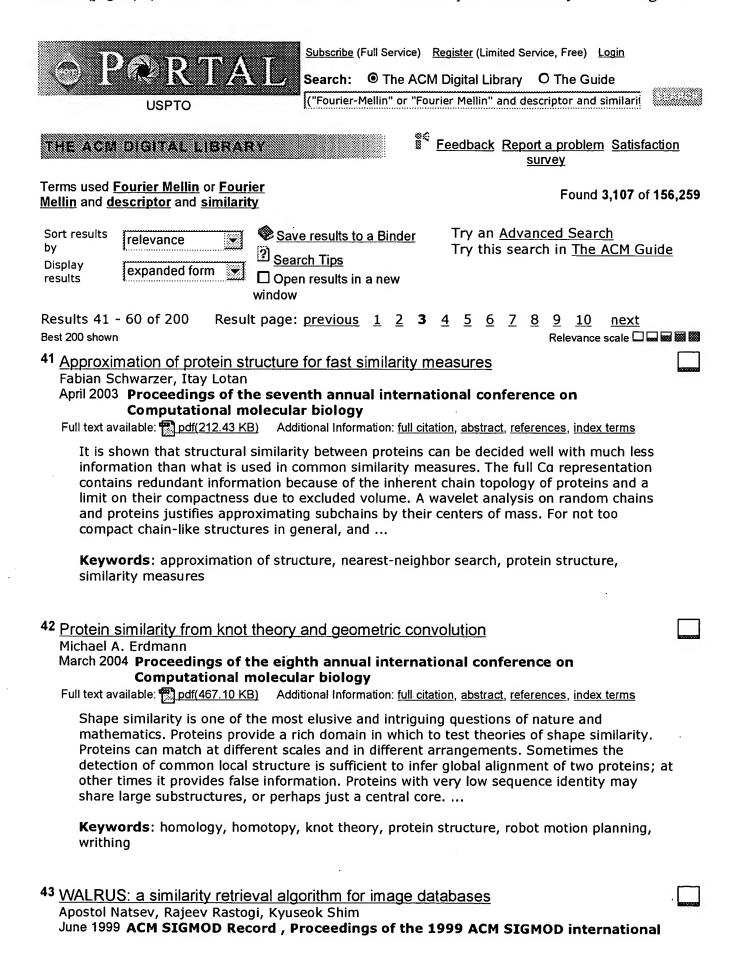

conference on Management of data, Volume 28 Issue 2

Additional Information: full citation, abstract, references, citings, index Full text available: pdf(1.63 MB) Traditional approaches for content-based image querying typically compute a single signature for each image based on color histograms, texture, wavelet tranforms etc., and return as the query result, images whose signatures are closest to the signature of the query image. Therefore, most traditional methods break down when images contain similar objects that are scaled differently or at different locations, or only certain regions of the image match. In this pape ... 44 Studying users: A graph-based recommender system for digital library Zan Huang, Wingyan Chung, Thian-Huat Ong, Hsinchun Chen July 2002 Proceedings of the 2nd ACM/IEEE-CS joint conference on Digital libraries Additional Information: full citation, abstract, references, citings, index Full text available: pdf(435.12 KB) terms Research shows that recommendations comprise a valuable service for users of a digital library [11]. While most existing recommender systems rely either on a content-based approach or a collaborative approach to make recommendations, there is potential to improve recommendation quality by using a combination of both approaches (a hybrid approach). In this paper, we report how we tested the idea of using a graph-based recommender system that naturally combines the content-based and collaborative ... Keywords: Hopfield net algorithm, chinese phrase extraction, collaborative filtering, content-based filtering, graph-based model, mutual information algorithm, recommender system 45 Multimedia data indexing: Looking at mapping, indexing & querying of MPEG-7 descriptors in RDBMS with SM3 Yang Chu, Liang-Tien Chia, Sourav S. Bhowmick November 2004 Proceedings of the 2nd ACM international workshop on Multimedia databases Full text available: Pdf(279.92 KB) Additional Information: full citation, abstract, references, index terms MPEG-7 documents, which are primarily for multimedia information exchange, are also data-centric XML documents. Due to its advantages, the relational DBMS is the best choice for storing such XML documents. Storing XML data in relational DBMS can be classified into two classes of storage model: structure-mapping and model-mapping. However, the structure-mapping model cannot support complex Xpath-based query efficiently and model mapping approach lacks the flexible capability in representing al ... **Keywords:** MPEG-7, SM3, relational DBMS, storing XML documents 46 Database session 1: querying high-dimensional data: Approximate searches: kneighbors + precision Sid-Ahmed Berrani, Laurent Amsaleg, Patrick Gros November 2003 Proceedings of the twelfth international conference on Information and knowledge management Additional Information: full citation, abstract, references, citings, index Full text available: pdf(154.57 KB) <u>terms</u> It is known that all multi-dimensional index structures fail to accelerate content-based

http://portal.acm.org/results.cfm?query=%28%22Fourier%2DMellin%22%20or%20%22Fou... 6/11/05

similarity searches when the feature vectors describing images are high-dimensional. It is possible to circumvent this problem by relying on approximate search-schemes trading-off result quality for reduced query execution time. Most approximate schemes, however, provide none or only complex control on the precision of the searches, especially when retrieving the k nearest neighbors (NNs) of query poi ...

Keywords: approximate nearest-neighbor searches, multimedia databases, similarity searches

47	IR-5 (information retrieval): information retrieval applications: Taxonomy-driven computation of product recommendations	*********
	Cai-Nicolas Ziegler, Georg Lausen, Lars Schmidt-Thieme November 2004 Proceedings of the Thirteenth ACM conference on Information and knowledge management	
	Full text available: pdf(269.57 KB) Additional Information: full citation, abstract, references, index terms	
	Recommender systems have been subject to an enormous rise in popularity and research interest over the last ten years. At the same time, very large taxonomies for product classification are becoming increasingly prominent among e-commerce systems for diverse domains, rendering detailed machine-readable content descriptions feasible. Amazon.com makes use of an entire plethora of hand-crafted taxonomies classifying books, movies, apparel, and various other goods. We exploit such taxonomic backg	
	Keywords: machine learning, recommender systems, taxonomies	
48	Information filtering: the computation of similarities in large corpora of legal texts Erich Schweighofer, Werner Winiwarter, Dieter Merkl May 1995 Proceedings of the 5th international conference on Artificial intelligence and law	
	Full text available: pdf(748.19 KB) Additional Information: full citation, references, citings, index terms	
49	Interactive modeling: Modeling by example Thomas Funkhouser, Michael Kazhdan, Philip Shilane, Patrick Min, William Kiefer, Ayellet Tal, Szymon Rusinkiewicz, David Dobkin	0000000
	August 2004 ACM Transactions on Graphics (TOG), Volume 23 Issue 3	
	Full text available: pdf(963.37 KB) mov(24:41 MIN) Additional Information: full citation, abstract, references	
	In this paper, we investigate a data-driven synthesis approach to constructing 3D geometric surface models. We provide methods with which a user can search a large database of 3D meshes to find parts of interest, cut the desired parts out of the meshes with intelligent scissoring, and composite them together in different ways to form new objects. The main benefit of this approach is that it is both easy to learn and able to produce highly detailed geometric models the conceptual design for ne	
	Keywords: 3D shape matching, databases of geometric models, interactive modeling tools	
50	Image retrieval: Content representation and similarity matching for texture-based image retrieval	
	Noureddine Abbadeni November 2003 Proceedings of the 5th ACM SIGMM international workshop on	
	Multimedia information retrieval	
	Full text available: pdf(409.30 KB) Additional Information: full citation, abstract, references, index terms	

This paper addresses the fundamental issues of visual content representation and similarity matching in content-based image retrieval and image databases in general. Simply stated, defining an image retrieval system is equivalent to find answers to two fundamental questions: 1. Representation model or which features are used to represent the content of images; 2. Once the set of features representing the content of images is determined, the question of how to combine the individual or partial si ...

Keywords: autoregressive model, content-based image retrieval, perceptual evaluation, perceptual model

51	Database theory, technology and applications (DTTA): Integrating similarity-based queries in image DBMSs Solomon Atnafu, Richard Chbeir, David Coquil, Lionel Brunie March 2004 Proceedings of the 2004 ACM symposium on Applied computing	
	Full text available: pdf(381.23 KB) Additional Information: full citation, abstract, references, index terms	
	Until recently, issues in image retrieval have been handled in DBMSs and in computer vision as separate research works. Nowadays, the trend is towards integrating the two approaches (content- and metadata-based) for multi-criteria image retrieval. However, most existing works and proposals in this domain lack a formal framework to deal with a multi-criteria query. In this paper, we introduce a formal framework to address this subject of image retrieval under an ORDBMS model. We first propose an	
,	Keywords: image DBMS, multi-criteria retrieval, multimedia algebra	
52	Social browsing: Studying the effect of similarity in online task-focused interactions Dan Cosley, Pamela Ludford, Loren Terveen November 2003 Proceedings of the 2003 international ACM SIGGROUP conference on Supporting group work	
	Full text available: pdf(257.50 KB) Additional Information: full citation, abstract, references, citings, index terms	
	Although the Internet provides powerful tools for social interactions, many tasks-for example, information-seeking-are undertaken as solitary activities. Information seekers are unaware of the invisible crowd traveling in parallel to their course through the information landscape. Social navigation systems attempt to make the invisible crowd visible, while social recommender systems try to introduce people directly. However, it is not clear whether users desire or will respond to social cues ind	
	Keywords : community, demographics, friendship, matchmaking, recommender systems, similarity, social navigation	
53	Poster papers: Similarity measure based on partial information of time series Xiaoming Jin, Yuchang Lu, Chunyi Shi July 2002 Proceedings of the eighth ACM SIGKDD international conference on Knowledge discovery and data mining	
	Full text available: pdf(704.61 KB) Additional Information: full citation, abstract, references, index terms	
	Similarity measure of time series is an important subroutine in many KDD applications. Previous similarity models mainly focus on the prominent series behaviors by considering the whole information of time series. In this paper, we address the problem: which portion of information is more suitable for similarity measure for the data collected from a certain	

time series data, and a methodology for evaluat ...

field. We propose a model for the retrieval and representation of the partial information in

Keywords: partial information, similarity measure, time series ⁵⁴ <u>Using extended feature objects for partial similarity retrieval</u> Stefan Berchtold, Daniel A. Keim, Hans-Peter Kriegel November 1997 The VLDB Journal — The International Journal on Very Large Data Bases, Volume 6 Issue 4 Full text available: 📆 pdf(679.89 KB) Additional Information: full citation, abstract, citings, index terms In this paper, we introduce the concept of extended feature objects for similarity retrieval. Conventional approaches for similarity search in databases map each object in the database to a point in some high-dimensional feature space and define similarity as some distance measure in this space. For many similarity search problems, this feature-based approach is not sufficient. When retrieving partially similar polygons, for example, the search cannot be restricted to edge sequences, since simil ... Keywords: CAD databases, Fourier transformation, Indexing and query processing of spatial objects, Partial similarity retrieval 55 Approximate similarity retrieval with M-trees Pavel Zezula, Pasquale Savino, Giuseppe Amato, Fausto Rabitti December 1998 The VLDB Journal — The International Journal on Very Large Data Bases, Volume 7 Issue 4 Full text available: pdf(265.65 KB) Additional Information: full citation, abstract, citings, index terms Motivated by the urgent need to improve the efficiency of similarity queries, approximate similarity retrieval is investigated in the environment of a metric tree index called the Mtree. Three different approximation techniques are proposed, which show how to forsake query precision for improved performance. Measures are defined that can quantify the improvements in performance efficiency and the quality of approximations. The proposed approximation techniques are then tested on various synthet ... Keywords: Access structures, Approximation algorithms, Distance only data, Performance evaluation, Similarity search ⁵⁶ Exploiting hierarchical domain structure to compute similarity Prasanna Ganesan, Hector Garcia-Molina, Jennifer Widom January 2003 ACM Transactions on Information Systems (TOIS), Volume 21 Issue 1 Additional Information: full citation, abstract, references, citings, index Full text available: pdf(285.80 KB) The notion of similarity between objects finds use in many contexts, for example, in search engines, collaborative filtering, and clustering. Objects being compared often are modeled as sets, with their similarity traditionally determined based on set intersection. Intersectionbased measures do not accurately capture similarity in certain domains, such as when the data is sparse or when there are known relationships between items within sets. We propose new measures that exploit a hierarchical ... **Keywords**: Similarity measures, collaborative filtering, data mining, hierarchy 57 Sequence similarity search and access methods: Similarity based retrieval from sequence databases using automata as queries

A. Prasad Sistla, Tao Hu, Vikas Chowdhry

November 2002 Proceedings of the eleventh international conference on Information and knowledge management

Full text available: pdf(198.46 KB) Additional Information: full citation, abstract, references, index terms

Similarity based retrieval from sequence databases is of importance in many applications such as time-series, video and textual databases. In this paper, automata based formalisms are introduced for specifying queries over such databases. Various measures defining the distance of a database sequence from an automaton are defined. Efficient methods for similarity based retrieval are presented for each of the distance measures. These methods answer nearest neighbor queries (i.e. retrieval of k clo ...

Keywords: automata, seugence databases, similarity based retrieval

	•	
58	Data integration using similarity joins and a word-based information representation	
	language	
	William W. Cohen July 2000 ACM Transactions on Information Systems (TOIS), Volume 18 Issue 3	
	Full text available: pdf(312.80 KB) Additional Information: full citation, abstract, references, citings, index terms, review	
	The integration of distributed, heterogeneous databases, such as those available on the World Wide Web, poses many problems. Herer we consider the problem of integrating data from sources that lack common object identifiers. A solution to this problem is proposed for databases that contain informal, natural-language "names" for objects; most Web-based databases satisfy this requirement, since they usually present their information to the enduser through a veneer of text. We des	
59	The IGrid index: reversing the dimensionality curse for similarity indexing in high	
	dimensional space	
	Charu C. Aggarwal, Philip S. Yu	
	August 2000 Proceedings of the sixth ACM SIGKDD international conference on Knowledge discovery and data mining	
	Full text available: pdf(247.92 KB) Additional Information: full citation, references, citings, index terms	
	Keywords: dimensionality curse, indexing	
~ ~		_
bU	A robust framework for content-based retrieval by spatial similarity in image databases	
	Essam A. El-Kwae, Mansur R. Kabuka April 1999 ACM Transactions on Information Systems (TOIS), Volume 17 Issue 2	
	Full text available: pdf(274.25 KB) Additional Information: full citation, abstract, references, citings, index terms, review	
	A framework for retrieving images by spatial similarity (FRISS) in image databases is presented. In this framework, a robust retrieval by spatial similarity (RSS) algorithm is defined as one that incorporates both directional and topological spatial constraints, retrieves similar images, and recognized images even after they undergo translation, scaling, rotation (both perfect and multiple), or any arbitrary combination of transformations. The FRISS framework is discussed and used as a ba	

formulation, retrieval models, similarity retrieval, spatial similarity

Keywords: content-based retrieval, image databases, multimedia databases, query

Results 41 - 60 of 200

Result page: <u>previous</u> <u>1</u> <u>2</u> **3** <u>4</u> <u>5</u> <u>6</u> <u>7</u> <u>8</u> <u>9</u> <u>10</u> <u>next</u>

The ACM Portal is published by the Association for Computing Machinery. Copyright © 2005 ACM, Inc.

<u>Terms of Usage Privacy Policy Code of Ethics Contact Us</u>

Useful downloads: Adobe Acrobat QuickTime Mindows Media Player Real Player